

SERIPLASTIK TEC – FLUO

1 DESCRIPTION

Fluorescent plastisol ink series for textile printing

2 MAIN FEATURES

- Very bright fluorescent effect
- Good opacity
- Good printability
- Soft touch
- Phthalate-free and heavy metal-free

3 PREPARATION

Ready-to-use ink

The viscosity of this ink allows to achieve a good opacity.

- In order to reduce the viscosity, use [3-5]% **SERIPLASTIK FLUIDIFICANTE** [Code .899]

USEFUL SUGGESTIONS

For printing on dark substrates, it is recommended to create a white background, by using inks of **SERIPLASTIK** series.


Curing conditions depend on the “weight” of the substrate to be printed. When this “weight” increases, time and temperature conditions must increase, too.

4 APPLICATION




SUBSTRATE

- WHITE COTTON
- COLOURED COTTON
- COTTON/SYNTHETIC



SCREEN

- min. 34 th/cm
- MAX 55 th/cm



SQUEEGEE

- 60-65 shores for “opaque” printing
- 70-75 shores for high definition printing



CURING

- TEMPERATURE 150°C
- TIME 2-3 minutes




SERIPLASTIK ADDITIVES

- Fluidifying [09.899]
- Thinner [99.101]
- Catalyst [12.888]



CLEANING

- BIOSOLV 2000 [99.178] Recommended for cleaning of all Screens and tools

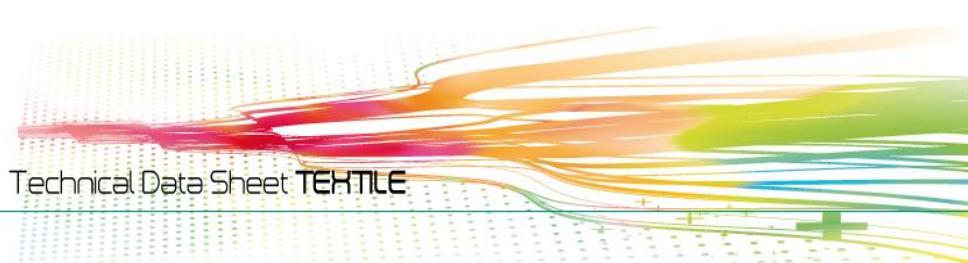

5

STORAGE

We suggest keeping the products at a temperature between 18°C and 30°C, away from sunlight.

6

COLOUR RANGE

69.750	69.752	69.754	69.756	69.757
---------------	---------------	---------------	---------------	---------------

The colour references in the above table are just an indication.

The colours with a better colorimetric approximation are indicated in the dedicated colour chart.

IMPORTANT NOTE

The information given in this technical sheet is not intended to be exhaustive and any person, using the product for any purpose other than that specifically recommended in this sheet without first obtaining written confirmation from us to the suitability of the product for the intended purpose, does so at his own risk. While we endeavour to ensure that all advice we give about the product is correct, we have no control over either the quality or condition of the substrate or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing to do so, we do not accept any liability whatsoever or howsoever arising for the performance of the product or for any loss or damage arising out of the use of the product. The information contained in this sheet is liable to modification from time to time in the light of experience and our policy of continuous product development.